




# Contactless reader CANCrocodile

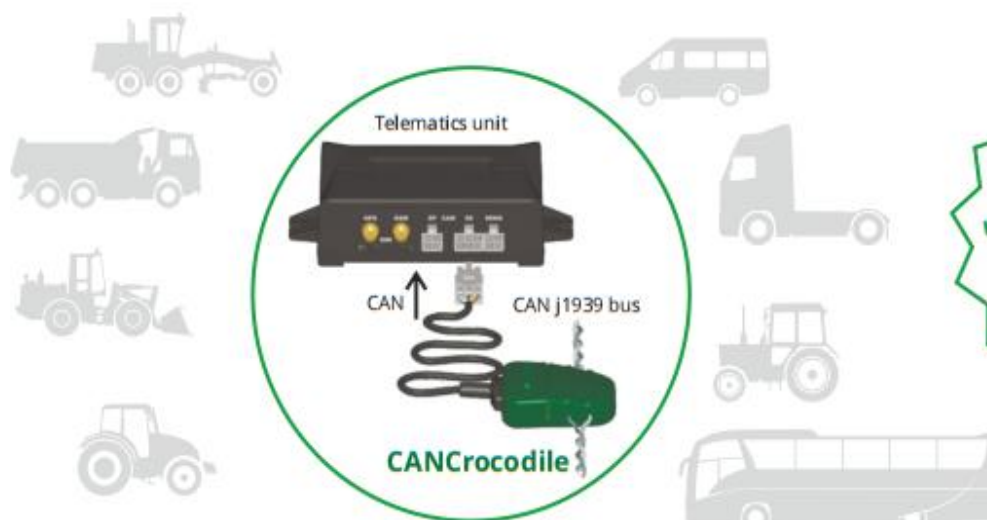

under 1mA current consumption of new version CANCrocodile A++

**CANCrocodile** is used in vehicle telematics and GPS tracking system for safe contactless data gathering from automotive buses T-CAN and M-CAN.

- ✓ CAN j1939 bus data reading with no damage to wire insulation.
- ✓ Protecting vehicle electronic systems against active requests from telematics unit.
- ✓ Saving warranty for a vehicle.



**Power-supplied by vehicle**  
directly from 12/24V electrical network of vehicle, without additional adapters.

**Wires meet automotive standards**  
resistant to breaks and temperature fluctuations


**Reliable CAN H и CAN L wire fastening**  
Wires are placed in grooves and firmly pressed to reading surface by elastic pad

## Easy installation - no special tools needed.

1. Open CANCrocodile case.
2. Put CAN H and CAN L wires along the marks on reading surface.
3. Close the case until click and connect CANCrocodile wires to telematics unit's CAN-port and electrical network of vehicle.



## Models:

CAN  **U12/24 L0.7 CS**

**U** - power supply voltage:

**12/24** - 12/24 V, basic version

**12/24 A++** - 12/24 V, current consumption in sleep mode is 1/0,5 mA

**5** - 5V

**L** - output cable length

**0.7** - 0,7m, basic version

**2** - 2,0 m

**C** - output cable ending:

**S** - connector, basic version

**W** - bare wires

**C** - crimped wires